


CMOS 4-BIT SINGLE CHIP MICROCOMPUTER  
**S5U1C63558D** Manual  
(Development Software Tool for S1C63558)

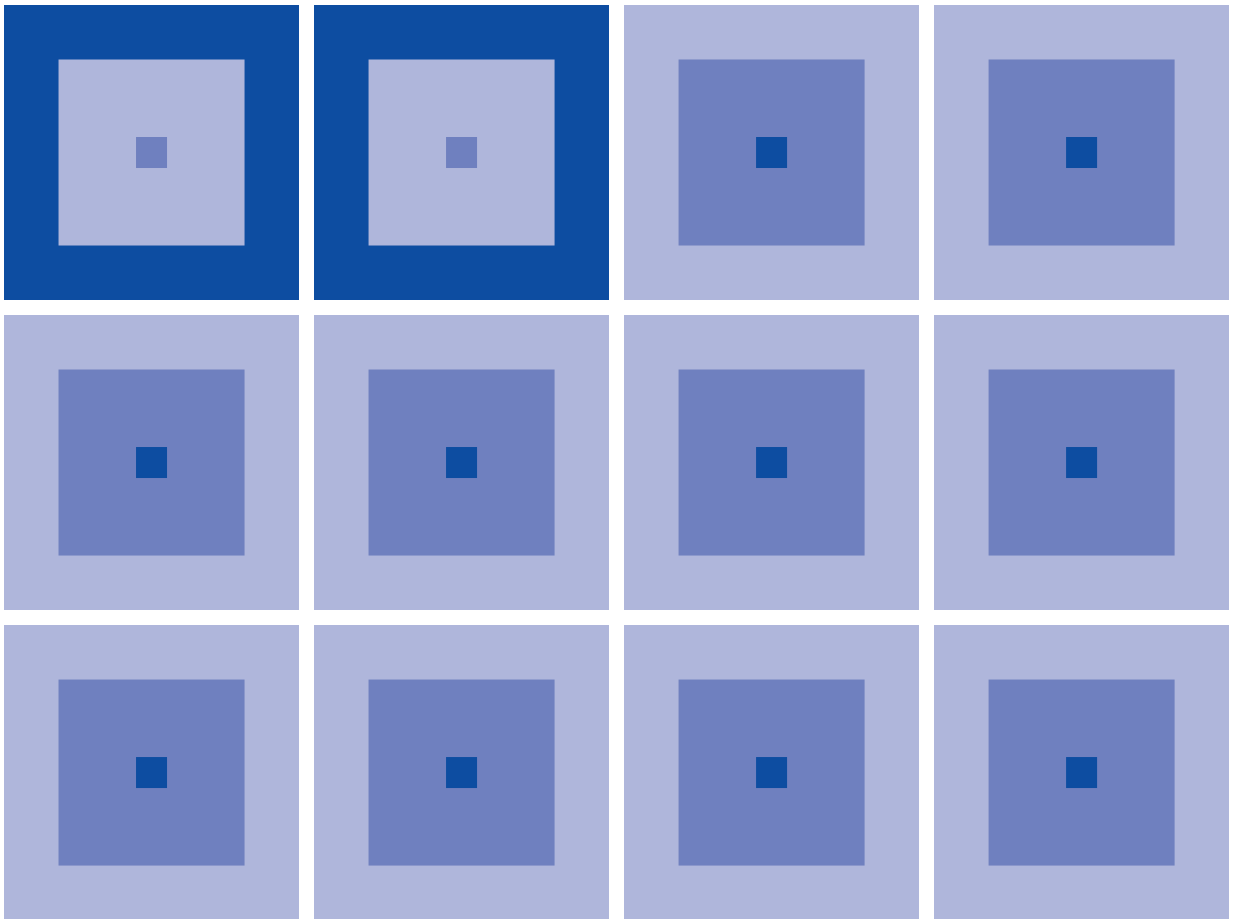

## ***NOTICE***

---

*No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of International Trade and Industry or other approval from another government agency.*


MS-DOS, Windows, Windows 95, Windows 98 and Windows NT are registered trademarks of Microsoft Corporation, U.S.A.  
PC-DOS, PC/AT, PS/2, VGA, EGA and IBM are registered trademarks of International Business Machines Corporation, U.S.A.  
NEC PC-9800 Series and NEC are registered trademarks of NEC Corporation.  
All other product names mentioned herein are trademarks and/or registered trademarks of their respective owners.

## The information of the product number change


Starting April 1, 2001, the product number will be changed as listed below. To order from April 1, 2001 please use the new product number. For further information, please contact Epson sales representative.

## Configuration of product number

Devices

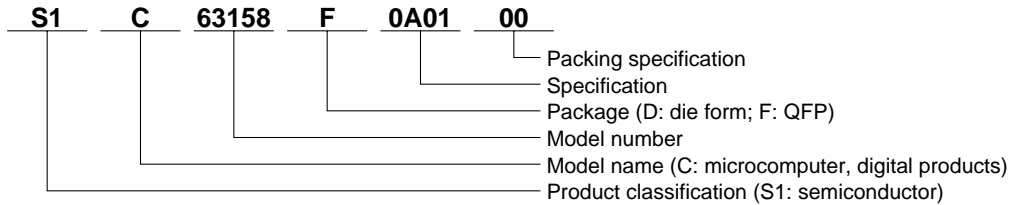

Development tools

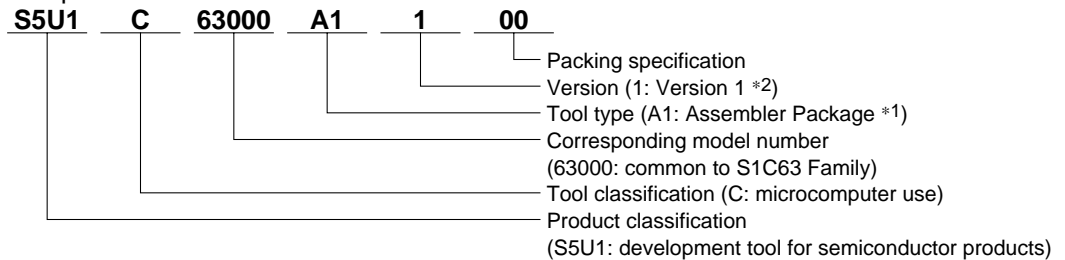

\*1: For details about tool types, see the tables below. (In some manuals, tool types are represented by one digit.)

\*2: Actual versions are not written in the manuals.

## Comparison table between new and previous number

S1C63 Family processors

Previous No.	New No.
E0C63158	S1C63158
E0C63256	S1C63256
E0C63358	S1C63358
E0C63P366	S1C6P366
E0C63404	S1C63404
E0C63406	S1C63406
E0C63408	S1C63408
E0C63F408	S1C6F408
E0C63454	S1C63454
E0C63455	S1C63455
E0C63458	S1C63458
E0C63466	S1C63466
E0C63P466	S1C6P466

S1C63 Family peripheral products

Previous No.	New No.
E0C5250	S1C05250
E0C5251	S1C05251

## Comparison table between new and previous number of development tools

Development tools for the S1C63 Family

Previous No.	New No.
ADP63366	S5U1C63366X
ADP63466	S5U1C63466X
ASM63	S5U1C63000A
GAM63001	S5U1C63000G
ICE63	S5U1C63000H1
PRC63001	S5U1C63001P
PRC63002	S5U1C63002P
PRC63004	S5U1C63004P
PRC63005	S5U1C63005P
PRC63006	S5U1C63006P
PRC63007	S5U1C63007P
URS63366	S5U1C63366Y

Development tools for the S1C63/88 Family

Previous No.	New No.
ADS00002	S5U1C88000X1
GWH00002	S5U1C88000W2
URM00002	S5U1C88000W1



## CONTENTS

<b>CHAPTER 1</b>	<b>OUTLINE OF PACKAGE</b>	<b>1</b>
1.1	Preface	1
1.2	Provided Floppy Disks	1
1.3	Outline of Software Tool	2
1.3.1	HEX data converter <hex63558>	3
1.3.2	Function option generator <fog63558>	3
1.3.3	Mask data checker <mdc63558>	3
1.3.4	Parameter file for ICE <par63558.par>	3
1.3.5	HEX file for LCD drive terminal setting <e0c63558.ssa>	3
1.3.6	HEX file for function option setting <c3558xxx.fsa>	3
1.4	Installation Procedure	3
<b>CHAPTER 2</b>	<b>HEX DATA CONVERTER (hex63558)</b>	<b>4</b>
2.1	Outline of hex63558	4
2.2	Execution Flow and Input/Output Files	4
2.3	Operation Procedure	5
2.3.1	Starting procedure	5
2.3.2	End procedure	5
2.4	Error and Warning Messages	6
2.4.1	Start-up error	6
2.4.2	Input file format error (1)	6
2.4.3	Input file format error (2)	6
2.4.4	System error	6
2.5	hex63558 Execution Example	7
<b>CHAPTER 3</b>	<b>FUNCTION OPTION GENERATOR (fog63558)</b>	<b>9</b>
3.1	Outline of fog63558	9
3.2	Execution Flow and Input/Output Files	9
3.3	Option List	10
3.4	Operation Procedure	12
3.4.1	Starting procedure	12
3.4.2	Setting new function options (Input new file)	13
3.4.3	Modifying function option settings (Edit file)	14
3.4.4	Option selection	15
3.4.5	HEX file generation	16
3.4.6	End procedure	16
3.5	Error Message	16
3.6	Sample Files	17
<b>CHAPTER 4</b>	<b>MASK DATA CHECKER (mdc63558)</b>	<b>19</b>
4.1	Outline of mdc63558	19
4.2	Execution Flow and Input/Output Files	19
4.3	Operation Procedure	20
4.3.1	Copying each data files	20
4.3.2	Starting procedure	20
4.3.3	Packing of data	22
4.3.4	Unpacking data	23
4.3.5	End procedure	23

## CONTENTS

4.4	<i>Error Messages</i> .....	24
4.4.1	<i>Start-up error</i> .....	24
4.4.2	<i>ROM data error</i> .....	24
4.4.3	<i>Function option data error</i> .....	24
4.4.4	<i>File access error</i> .....	24
4.5	<i>Packed File</i> .....	25
4.5.1	<i>Configuration of packed file</i> .....	25
4.5.2	<i>ROM data format</i> .....	25

# CHAPTER 1 OUTLINE OF PACKAGE

## 1.1 Preface

---

The "S1C63558 Development Tool" package is a software development tool package for the CMOS 4-bit single chip microcomputer S1C63 Family, and consists of software tools necessary for debugging by the ICE (S5U1C63000H) and mask option setting for the S1C63558. The "S1C63 Family Assembler Package" common to all the family models is also necessary for the software development in addition to this package.

- |  |                     |
|--|---------------------|
| 1) HEX data converter .....                          | <b>hex63558</b>     |
| 2) Function option generator .....                   | <b>fog63558</b>     |
| 3) Mask data checker .....                           | <b>mdc63558</b>     |
| 4) Parameter file for ICE .....                      | <b>par63558.par</b> |
| 5) HEX file for LCD drive terminal setting .....     | <b>e0c63558.ssa</b> |
| 6) HEX sample file for function option setting ..... | <b>c3558xxx.fsa</b> |

## 1.2 Provided Floppy Disks

---

This package includes the following floppy disks which are necessary for debugging by the ICE and mask option setting of the IC for the S1C63558 development.

- |   |   |
|---|---|
| 1) 3.5" floppy disk for NEC PC9801 .....  | 1 |
| 2) 3.5" floppy disk for IBM-PC/AT .....   | 1 |
| 3) S5U1C63558D Manual (Development Software Tool for S1C63558) (English) .....  | 1 |
| 4) S5U1C63558D Manual (Development Software Tool for S1C63558) (Japanese) ..... | 1 |

The type of the personal computer that can be used with the development system and the restrictions are as follows:

- |                               |  |
|-------------------------------|--|
| <b>1) Model:</b>              | IBM-PC/AT or compatible model<br>NEC PC9801 Series or compatible model                           |
| <b>2) OS:</b>                 | MS-DOS or PC-DOS, ver. 3.3 or higher   |
| <b>3) RAM capacity:</b>       | 640K bytes   |
| <b>4) Disk drive:</b>         | 3.5 inches (1.2M: PC9801 and the compatible)<br>3.5 inches (1.44M: IBM-PC/AT and the compatible) |
| <b>5) Necessary software:</b> | General purpose editor   |

\* This software operates in the real mode and does not use EMS and protected memory.

Keep the original disk in a safe place as a backup after copying the contents to hard disk or other floppy disk.

### 1.3 Outline of Software Tool

The software tools included in this package take position indicated in the following Figure 1.3.1 (parts with a half-tone) on the whole software development.

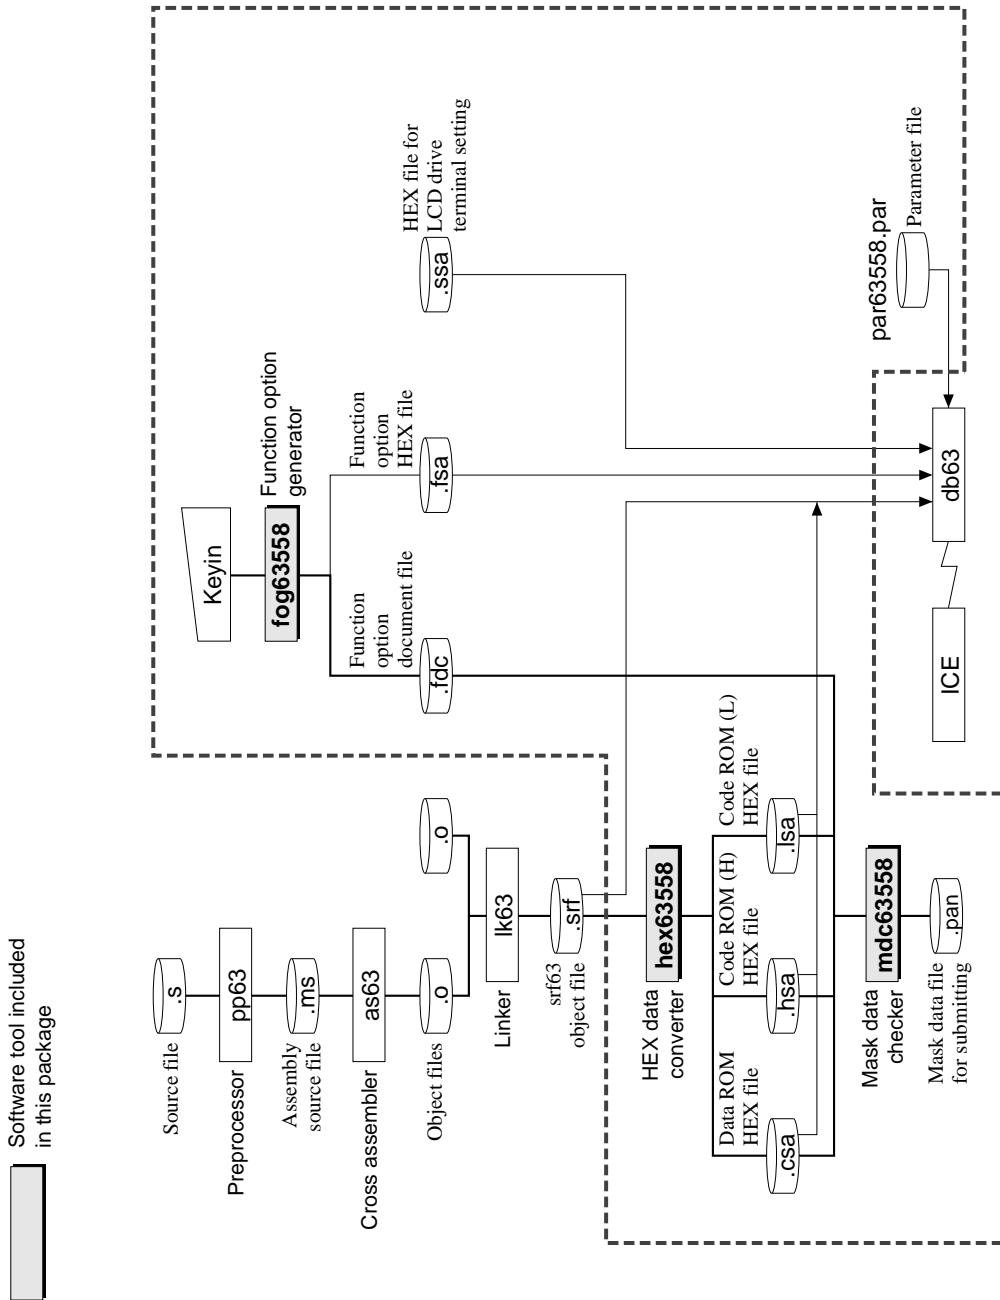


Fig. 1.3.1 Software development flow



The following shows the outline of the basic function of each software.

### ***1.3.1 HEX data converter <hex63558>***

The HEX data converter hex63558 converts the file output by the linker (lk63) for the S1C63 Family into a HEX file (Motorola S2 format). At the same time, it fills unused ROM space with FFH data. The completed program should be finally verified by loading the HEX file output from this tool to the ICE.

### ***1.3.2 Function option generator <fog63558>***

In the S1C63558, some hardware specifications such as an I/O port function can be selected as mask option. The function option generator fog63558 is a tool that can interactively select the S1C63558 mask option settings and generates the mask option setting file for the ICE and the function option document file for generating the IC mask pattern.

### ***1.3.3 Mask data checker <mdc63558>***

The mask data checker mdc63558 is a software tool that checks the ROM data and option data developed and generates a file for submitting to Seiko Epson.

### ***1.3.4 Parameter file for ICE <par63558.par>***

This is a parameter file for setting the ICE so that the ICE will be compatible with each model. Place this file in the directory where the tools for the "S1C63 Family Assembler Package" are installed.

### ***1.3.5 HEX file for LCD drive terminal setting <e0c63558.ssa>***

The ICE has 80 SEG terminals built-in for driving the LCD, however, the S1C63558 can use 48 of them. This file is used to set the SEG terminal configuration in the ICE to correspond with the S1C63558. This file must be loaded to the ICE at the beginning of debugging using the "lo" command.

### ***1.3.6 HEX file for function option setting <c3558xxx.fsa>***

This file is used to define the function option and other settings of each model into the ICE. This file is included in the package as a sample.

Create an actual use file using the function option generator fog63558.

## ***1.4 Installation Procedure***

---

This package does not include an installer program. Please copy the all files to the working directory.

# CHAPTER 2 *HEX DATA CONVERTER (hex63558)*

## 2.1 *Outline of hex63558*

The HEX data converter utility hex63558 converts the file (~.srf) output by the linker (lk63) for the S1C63 Family into a HEX file (Motorola S2 format). At the same time, it fills unused ROM space with FFH data. The completed program should be finally verified by loading the HEX files output from this tool to the ICE. Then create data for submitting to Seiko Epson from the HEX files using the mask data checker (mdc63558).

## 2.2 *Execution Flow and Input/Output Files*

Figure 2.2.1 shows the hex63558 execution flow.

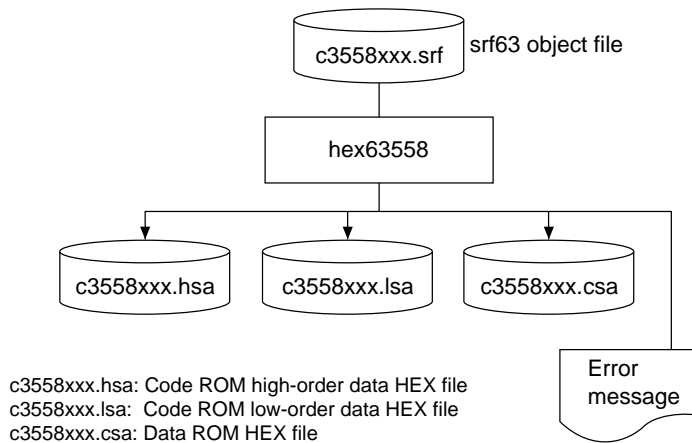


Fig. 2.2.1 hex63558 execution flow

*Note:* Since the customer code is entered in the xxx part of the file name, it should be as designated by Seiko Epson.

The hex63558 inputs an object file (srf63 format) and generates three HEX files (Motorola S2 format). The object file name is used as the output file name except for the extension. For example, if the object file name is "c35580a0.srf", the hex63558 outputs three files as below:

- 1) c35580a0.hsa
- 2) c35580a0.lsa
- 3) c35580a0.csa

### (1) Input file

- **Object file (~.srf)**  
This is an srf63 format object file output from the linker lk63.

### (2) Output files

- **Code ROM high-order data HEX file (~.hsa)**  
The hex63558 outputs this file in Motorola S2 format. This file contains high-order 5 bits of the codes (13 bits each) in the object file.
- **Code ROM low-order data HEX file (~.lsa)**  
The hex63558 outputs this file in Motorola S2 format. This file contains low-order 8 bits of the codes (13 bits each) in the object file.
- **Data ROM HEX file (~.csa)**  
The hex63558 outputs this file in Motorola S2 format. This file contains the data (4 bits) in the object file.

## 2.3 Operation Procedure

### 2.3.1 Starting procedure

#### (1) Starting command

Enter the command as following format at the DOS command level (state in which a prompt such as A> is displayed).

```
hex63558 <Object file name[.srf]>[ ]
```

[ ] indicates the Return key.

A parameter enclosed by [ ] can be omitted.

The input file should be placed in the current directory. The output files are also generated in the current directory.

#### (2) Start-up message

When the hex63558 starts up, the following message is displayed.

Example: File name: c35580a0.srf

```
A>hex63558 c35580a0.srf[ ]
E0C63558 HEX Data Converter Ver.x.xx
Copyright (C) SEIKO EPSON CORP. 199x
Now checking the SROFF file ...
```

### 2.3.2 End procedure

When a series of operations is completed, the hex63558 displays the following message and returns to the DOS command level.

#### (1) When terminated normally

The hex63558 displays the following message after generating the output files and returns to the DOS command level.

```
.....
Now checking the SROFF file ...
OK.
A>
```

#### (2) When an error occurs

The hex63558 displays an error message and returns to the DOS command level. The output file is not generated.

```
.....
Now checking the SROFF file ...
Error:<Error message>
A>
```

#### (3) When a warning occurs

The hex63558 displays a warning message, but continues the processing. It returns to the DOS command level after generating the output files.

```
.....
Now checking the SROFF file ...
Warnig:<Warning message>
OK.
A>
```

## 2.4 Error and Warning Messages

The hex63558 error messages and warning message are listed below.

### 2.4.1 Start-up error

Message	Explanation
Usage: hex63 <file name>	The start-up parameter is incorrect.
Error: "xxxxxxx.xxx" file is not found.	The specified object file is not found.

### 2.4.2 Input file format error (1)

Message	Explanation
Error: The start address is out of range.	The start address is out of the ROM capacity range.
Error: The end address is out of range.	The end address is out of the ROM capacity range.
Error: Input file is not E0C63 Sroff file.	The object file specified is not an srf63 file for the S1C63 Family.

### 2.4.3 Input file format error (2)

When an error message as shown below appears, try to execute the hex63558 again after re-creating the srf63 file. If a similar error still results, please notify Seiko Epson of the situation and the error message displayed.

Message	Explanation
Error: The start address offset error.	The start address is incorrect.
Error: Code conflicted at XXXXH.	A conflict occurred at address XXXXH in the code ROM.
Error: Data conflicted at XXXXH.	A conflict occurred at address XXXXH in the data ROM.
Error: Information chain empty.	The information is empty.
Error: Chain information size is greater than file size.	The chain information size is greater than the file size.
Error: Chain seek address is greater than file size.	The chain seek address is greater than the file size.
Error: File control flag error.	The file control flag in the link format is incorrect.
Error: Entry address error.	The entry address is not 0x00000110.
Error: Section address error.	The section address is out of the 0x00000000 to 0x0000ffff range.
Error: Section ID error.	The section ID is out of the 0x0000 to 0x00ff range.
Warnig: Section information chain is not found.	There is no section information chain.

### 2.4.4 System error

Message	Explanation
Error: File open error.	The file cannot be opened.
Error: File write error.	The file cannot be written.
Error: File read error.	The file cannot be read.
Error: Memory allocate error.	Memory is insufficient.

## 2.5 hex63558 Execution Example

The following shows an example of when an srf63 format file ("c35580a.srf") is converted into a Motorola S2 format file ("c35580a.hsa", "c35580a.lsa", "c35580a.csa").

```
A>hex63558 c35580a0.srf
```

### ■ Example of input file

```
<c35580a0.srf>
```

#### Hex dump output

```
00000000 00 0A 00 00 01 10 63 00 00 00 00 10 00 00 00 90      c
00000010 00 00 00 3C 00 01 00 00 00 02 00 00 01 10 00 00      <
00000020 00 00 00 00 00 00 00 00 00 68 00 00 00 10 00 00      h
00000030 00 01 00 00 00 88 00 00 00 06 00 00 00 00 00 00
00000040 00 02 00 00 00 02 00 00 80 00 00 00 00 00 00 00
00000050 00 00 00 00 00 78 00 00 00 10 00 00 00 01 00 00      x
00000060 00 8E 00 00 00 02 00 01 00 00 00 00 00 00 00 00
00000070 00 00 00 02 02 4C 31 00 00 00 00 00 00 00 00 00      L1
00000080 00 00 00 02 02 4C 32 00 1E F2 19 72 18 72 0A 0F      L2   r r
00000090 00 00 00 00 00 00 00 00 B4 00 00 00 0D 00 00 00 01
000000A0 00 00 00 C1 00 00 00 3C 00 00 00 FD 00 00 00 20      <
000000B0 00 00 00 02 00 00 00 08 73 61 6D 70 6C 65 2E 73      sample.s
000000C0 00 FF FF 00 00 00 00 00 00 00 00 00 00 00 00 00
000000D0 06 00 00 00 00 00 00 00 00 00 00 00 07 00 00 00
000000E0 00 00 01 00 00 00 00 00 08 00 00 00 00 00 02 00
000000F0 00 FF FE 00 00 00 00 00 00 00 00 00 00 00 00 00
00001000 00 00 02 00 00 00 00 00 00 02 4C 31 00 00 00 01      L1
00001100 00 02 00 00 00 00 00 01 02 4C 32                      L2
```

### ■ Example of output file

```
<c35580a0.csa>
```

```
S224000000A0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFDB
S224000020FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFDB
S224000040FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFBB
S224000060FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF9B
S224000080FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7B
S2240000A0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF5B
S2240000C0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF3B
S2240000E0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF1B
S224000100FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFA
S224000120FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFDA
S224000140FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFBA
:      :      :      :      :      :      :
S2240007C0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF34
S2240007E0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF14
S804000000FB
```

```
<c35580a0.hsa>
```

```
S224000000FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFDB
S224000020FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFDB
S224000040FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFBB
S224000060FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF9B
S224000080FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF7B
S2240000A0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF5B
S2240000C0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF3B
S2240000E0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF1B
S224000100FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF1E1918FFFFFFFFFFFFFFFFF8
S224000120FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFDA
S224000140FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFBA
:      :      :      :      :      :      :
S224000FC0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF2C
S224001FE0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF0C
S804000000FB
```

CHAPTER 2: HEX DATA CONVERTER (hex63558)

<c35580a0.lsa>

```
S22400000FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S224000020FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S224000040FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S224000060FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S224000080FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S2240000A0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S2240000C0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S2240000E0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S224000100FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S224000120FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S224000140FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
:           :           :           :           :           :           :           :
S224000FC0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S224001FE0FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
S804000000FB
```

# CHAPTER 3 FUNCTION OPTION GENERATOR (fog63558)

## 3.1 Outline of fog63558

The S1C63558 4-bit single ship microcomputer has 10 mask options to select hardware specifications such as I/O port functions. By modifying the IC mask patterns of the S1C63558 according to the options selected, the system can be customized to meet the specifications of the target system.

The function option generator fog63558 is a software tool for generating the document file used to generate IC mask patterns. The mask options for the S1C63558 can be interactively selected. From the data file created with fog63558, the S1C63558 mask pattern is automatically generated by a CAD machine at Seiko Epson.

In addition, HEX data in the Motorola S2 format necessary for debugging using the ICE can be created. By downloading this data file from the host machine when debugging with the ICE, the same option functions as the actual IC can be realized on the ICE.

## 3.2 Execution Flow and Input/Output Files

Figure 3.2.1 shows the fog63558 execution flow.

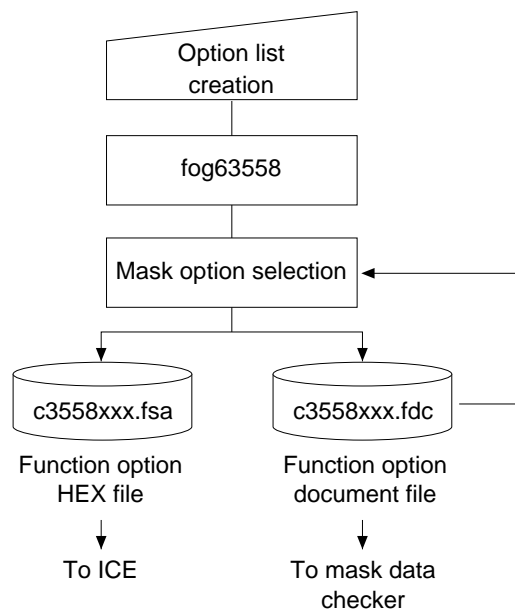


Fig. 3.2.1 fog63558 execution flow

**(1) Option list creation**

Select the S1C63558 mask options that meet the target system and record them in the option list (see Section 3.3).

**(2) fog63558 execution**

Start the fog63558 and select the mask options according to the display on screen. Since options can be selected using the interactive format, a device such as a source file is not necessary.

In addition, when correcting the contents, once it has been set, the necessary points alone can be corrected by inputting the file that was output by the fog63558.

As a result, the fog63558 outputs the following two files.

- **Function option document file (c3558xxx.fdc)**

This file contains the mask option setting data and is used for generating a mask pattern of the IC at Seiko Epson. The option setting data in this file can be modified by loading it to the fog63558. This file should be packed with the completed program files for submitting to Seiko Epson.

- **Function option HEX file (c3558xxx.fsa)**

This file is a Motorola S2 format data file for setting the S1C63558 mask options to the ICE. When debugging programs with the ICE, this file should be loaded into the ICE using a command from the db63 debugger for the ICE.

\*1 Since the customer code is entered in the xxx part of the file name, it should be as designated by Seiko Epson.

\*2 Pack the document file and the program files using the mask data checker and submit it to Seiko Epson.

\*3 Refer to the "S5U1C63000A Manual" for the method of downloading the mask options into the ICE.

### 3.3 Option List

---

The following options can be set for the S1C63558.

Multiple selections are available in each option item as indicated in the Option List. Using "S1C63558 Technical Manual" as reference, select the specifications that meet the target system and check the appropriate box. Be sure to record the specifications for unused functions too, according to the instructions provided.

The option selection is done interactively on the screen during the fog63558 execution, using this option list as reference.

**1 MULTIPLE KEY ENTRY RESET COMBINATION**

- 1. Not Use
- 2. Use <K00, K01, K02, K03>
- 3. Use <K00, K01, K02>
- 4. Use <K00, K01>

**2 MULTIPLE KEY ENTRY RESET TIME AUTHORIZE**

- 1. Not Use
- 2. Use

**3 INPUT PORT PULL UP RESISTOR**

- |             |   |   |
|-------------|---|---|
| • K00 ..... | <input type="checkbox"/> 1. With Resistor | <input type="checkbox"/> 2. Gate Direct |
| • K01 ..... | <input type="checkbox"/> 1. With Resistor | <input type="checkbox"/> 2. Gate Direct |
| • K02 ..... | <input type="checkbox"/> 1. With Resistor | <input type="checkbox"/> 2. Gate Direct |
| • K03 ..... | <input type="checkbox"/> 1. With Resistor | <input type="checkbox"/> 2. Gate Direct |
| • K10 ..... | <input type="checkbox"/> 1. With Resistor | <input type="checkbox"/> 2. Gate Direct |
| • K11 ..... | <input type="checkbox"/> 1. With Resistor | <input type="checkbox"/> 2. Gate Direct |
| • K12 ..... | <input type="checkbox"/> 1. With Resistor | <input type="checkbox"/> 2. Gate Direct |
| • K13 ..... | <input type="checkbox"/> 1. With Resistor | <input type="checkbox"/> 2. Gate Direct |



**4 OUTPUT PORT OUTPUT SPECIFICATION**

- R00 .....  1. Complementary  2. Nch Open Drain
- R01 .....  1. Complementary  2. Nch Open Drain
- R02 .....  1. Complementary  2. Nch Open Drain
- R03 .....  1. Complementary  2. Nch Open Drain
- R10 .....  1. Complementary  2. Nch Open Drain
- R11 .....  1. Complementary  2. Nch Open Drain
- R12 .....  1. Complementary  2. Nch Open Drain
- R13 .....  1. Complementary  2. Nch Open Drain
- R20 .....  1. Complementary  2. Nch Open Drain
- R21 .....  1. Complementary  2. Nch Open Drain
- R22 .....  1. Complementary  2. Nch Open Drain
- R23 .....  1. Complementary  2. Nch Open Drain

**5 I/O PORT OUTPUT SPECIFICATION**

- P00 .....  1. Complementary  2. Nch Open Drain
- P01 .....  1. Complementary  2. Nch Open Drain
- P02 .....  1. Complementary  2. Nch Open Drain
- P03 .....  1. Complementary  2. Nch Open Drain
- P10 .....  1. Complementary  2. Nch Open Drain
- P11 .....  1. Complementary  2. Nch Open Drain
- P12 .....  1. Complementary  2. Nch Open Drain
- P13 .....  1. Complementary  2. Nch Open Drain
- P20 .....  1. Complementary  2. Nch Open Drain
- P21 .....  1. Complementary  2. Nch Open Drain
- P22 .....  1. Complementary  2. Nch Open Drain
- P23 .....  1. Complementary  2. Nch Open Drain
- P30 .....  1. Complementary  2. Nch Open Drain
- P31 .....  1. Complementary  2. Nch Open Drain
- P32 .....  1. Complementary  2. Nch Open Drain
- P33 .....  1. Complementary  2. Nch Open Drain

**6 I/O PORT PULL UP RESISTOR**

- P0x .....  1. With Resistor  2. Gate Direct
- P1x .....  1. With Resistor  2. Gate Direct
- P20 .....  1. With Resistor  2. Gate Direct
- P21 .....  1. With Resistor  2. Gate Direct
- P22 .....  1. With Resistor  2. Gate Direct
- P23 .....  1. With Resistor  2. Gate Direct
- P3x .....  1. With Resistor  2. Gate Direct

**7 DP PORT OUTPUT SPECIFICATION**

- 1. Complementary  2. Nch Open Drain

**8 SVD EXTERNAL VOLTAGE DETECTION**

- 1. Not Use
- 2. Use

**9 LCD DRIVER SPECIFICATION**

- 1. 40 seg \* 17 com
- 2. 48 seg \* 8 com

**10 FSK INTERNAL FEEDBACK RESISTOR**

- 1. Use
- 2. Not Use

## 3.4 Operation Procedure

### 3.4.1 Starting procedure

#### (1) Starting command

```
fog63558 ↵
```

↵ indicates the Return key.

To start fog63558, enter "fog63558" at the DOS command level (a state in which a prompt such as A> is displayed). The "fog63558.exe" program should be previously copied into the working directory.

#### (2) Start-up message

```
A>fog63558
E0C63558 Function Option Generator Version x.xx
Copyright (C) SEIKO EPSON CORP. 199x

This software makes the following files.

c3558xxx.fsa ... function option HEX file.
c3558xxx.fdc ... function option document file.
```

When the fog63558 starts up, the start-up message is displayed.

The following explains the actual operation method of the fog63558 according to the screen displayed.

To suspend execution, press the "CTRL" and "C" keys together; the sequence returns to the DOS command level. It is possible by pressing "STOP" key depending on the PC used.

#### (3) Date input

```
Current data is '98/08/09
Please input new data : ↵
```

Following the start-up message, the date currently set in the host computer is displayed, prompting entry of a new date. When modifying the date, enter the 2-digit year, month, and day of the month by delimiting them with a slash ("/"). When not modifying the date, press the Return key to continue.

#### (4) Operation selection menu

```
*** Operation select menu ***

    1. Input new file
    2. Edit file
    3. Return to dos

Please select No. ?
```

When the date is set, the operation selection menu is displayed on the screen. Enter a number from 1 to 3 to select a subsequent operation.

The items indicate the following.

- 1. Input new file:** Used to set new function option file.
- 2. Edit file:** Used to read the already-generated function option document file and set or modify the option contents. In this case, the current directory must contain the function option document file (c3558xxx.fdc) generated by "1. Input new file".
- 3. Return to DOS:** Used to terminate the fog63558 and return to the DOS command level.

### 3.4.2 Setting new function options (Input new file)

This section explains how to set new function option file.

\* In the examples,  indicates the Return key.

```

*** Operation select menu ***

    1. Input new file
    2. Edit file
    3. Return to dos

Please select No. ? 1                ...(1)

Please input file name ? c3558xxx                ...(2)
Please input user's name ? SEIKO EPSON CORP.                ...(3)
Please input any comment
(one line is 50 chr) ? TOKYO DESIGN CENTER                ...(4)
                        ? 421-8 HINO HINO-SHI TOKYO 191-8501 JAPAN
                        ? TEL 042-587-5816
                        ? FAX 042-587-5624
                        ? 

```

#### (1) Please select No. ?

Select "1. Input new file" on the operation selection menu.

#### (2) Please input file name ?

Enter the function option document (and HEX) file name to be generated. Do not enter the extension of the file name.

Furthermore, in case a function option document file with the same name as the file name specified in the current directory exists, the user is asked whether overwritten is desired. Enter "Y" or "N" accordingly.

```

Please input file name ? c3558xxx
File exists. Overwrite (y/n) ?

```

#### (3) Please input user's name ?

Enter your company name.

Up to 40 characters may be entered. If 41 or more characters are entered, they are ignored.

"[" and "]" are converted into "(" and ")" to record in the document file.

#### (4) Please input any comment

Enter any comment. Up to 50 characters may be entered in one line. If 51 or more characters are entered in one line, they are ignored. Up to 10 comment lines may be entered. To end entry of comments, press the Return key at the beginning of the line. Small letters entered are converted into capital letters to record in the document file.

Furthermore, include the following in comment lines:

- Department, division, and section names
- Company address, phone number, and FAX number
- Other information, including technical information

Moreover, the below symbols for the inputting of (3) and (4) cannot be used. When those symbols are input, it displays an "Illegal character" error message, then again returns to the input status for that line.

"\$", "\", ("¥)", "|", "\ (back-quote)" ... input disabled

Next, start mask option setting for the S1C63558. For new settings, select options Option No. 1 to No. 10 sequentially and interactively.

See "3.4.4 Option selection" for the selection procedure of each function option.

### 3.4.3 Modifying function option settings (Edit file)

This section explains how to modify the settings in the function option file.

\* In the examples,  indicates the Return key.

```

*** Operation select menu ***

    1. Input new file
    2. Edit file
    3. Return to dos

Please select No. ? 2                ... (1)

*** Source file(s) ***

C35580A0      C35580B0      C35580C0      ... (2)

Please input file name ? c35580A0    ... (3)
Please input user's name ?                 ... (4)
Please input any comment
(one line is 50 chr) ?                 ... (5)
Please input edit no.(End=e) ? 2    ... (6)

```

#### (1) Please select No. ?

Select "2. Edit file" on the operation selection menu.

#### (2) \*\*\* Source file(s) \*\*\*

Will display the function option document files on the current drive.

If no modifiable source exists, the following message is displayed and the program is terminated.

```
Function option document file is not found.
```

#### (3) Please input file name ?

Enter a file name. Do not enter the extension of the file name. If the specified function option document file (c3558xxx.fdc) is not in the current directory, an error message like the one below is output, prompting entry of other file name.

```
Please input file name ? c35580a0
Function option document file is not found.
```

#### (4) Please input user's name ?

When modifying the company name, enter a new name. The previously entered name may be used by pressing the Return key.

#### (5) Please input any comment

When modifying a comment, enter all the comment lines anew, beginning with the first line; comment data cannot be partially modified. Previously entered comment data can be used by pressing the Return key. The input conditions are the same as for new settings.

#### (6) Please input edit No. (End = e) ?

Enter the number (1-10) of the option to be modified, then start setting the option contents (See "3.4.4 Option selection").

When selection of one option is complete, the system prompts entry of another function option number. Repeat selection until all options to be modified are selected.

If the Return key is pressed without entering a number, the option of the subsequent number can be selected.

Enter "E " to end option selection. Then, move to generate for the function option HEX file.

Example: • When modifying the settings of the option of No. 2

```
Please input edit No.(End=e) ? 2
```

• When ending setting

```
Please input edit No.(End=e) ? E
```

### 3.4.4 Option selection

Selection procedure for function options are described below.

Option selection is done interactively. For new settings (Input new file), set all options Option No. 1 to No. 10 sequentially; to modify settings (Edit file), the specified option number may be set directly.

#### (1) Example of option selection

```
*** Option No.1 ***
--- Multiple key entry reset combination ---

    1. Not use
    2. Use K00,K01,K02,K03
    3. Use K00,K01,K02
    4. Use K00,K01

Please select No.(1) ? 1 
    1. Not use                               selected
```

The selections for each option correspond one to one to the option list. While referring to the contents recorded in the option list, enter the selection number.

In the message that prompts entry, the value in parentheses ( ) indicates the default value in case of new settings, or the previously set value in case of setting modification. This value is set when only the Return key is pressed.

Furthermore, in the selection examples, "" indicates the Return key input.

When all of option settings are completed in new settings, move to the generate for the function option HEX file.

When modify settings are completed, move to generate for the function option HEX file by entering "E".

#### (2) Modifying procedure when wrong number is selected in new setting (Input new file)

```
--- Input port pull up resistor ---

    K01: 1. With resistor
         2. Gate director

Please select No.(1) ? B 

*** Option No.3 ***
--- Input port pull up resistor ---

    K00: 1. With resistor
         2. Gate director

Please select No.(1) ?
```

To modify previously set option in the new setting process (Input new file), enter "B" to return 1 step back to the previous function option setting operation.

### 3.4.5 HEX file generation

When function option settings are completed, the following message is output to ask the user whether to generate the function option HEX file.

```
End of option setting.
Do you make HEX file (y/n) ? y
```

Enter "Y" to generate the HEX file (c3558xxx.fsa). If "N" is entered, no HEX file is generated and only document file (c3558xxx.fdc) is generated.

Since the function option HEX file (c3558xxx.fsa) is needed when debugging the target program with the ICE, normally set "Y".

Furthermore, when debugging with the ICE, download the generated HEX file into the ICE.

When the above operation is completed, the fog63558 generates the function option HEX file and function option document file. And then the following message is output and the sequence returns to the operation selection menu. However, when "N" is input in the above selection for the function option HEX file, the end message shown below is not displayed.

```
Making file(s) is completed.
```

### 3.4.6 End procedure

```
*** Operation select menu ***

1. Input new file
2. Edit file
3. Return to dos
```

When a series of operations are completed, the sequence returns to the operation selection menu. Execution of the fog63558 can be terminated by selecting "3. Return to DOS" on this menu.

The fog63558 can be forcibly terminated by pressing the "CTRL" and "C" keys together during this software execution. (It is possible by pressing "STOP" key depending on the PC used.) However, in this case, the correct function option HEX file and function option document file are not generated.

## 3.5 Error Message

Table 3.5.1 lists the fog63558 error messages.

Table 3.5.1 fog63558 error message list

Message	Explanation
Illegal character!!	There is an input character error. An input disable character has been input.
Function option document file is not found.	There is no document file at the time of the setting modification (Edit file). There is no document file with the input file name at the time of the setting modification (Edit file).
File name error.	9 characters or more have been input for the file name input.
Bad function option document file.-filename-	A function option document file other than for the S1C63558 is specified during modification (Edit file).
Error: File write error.	The function option document file or function option HEX file cannot be created. This error may occur if there is no disk space.
Can't open file : filename	The file cannot be opened. This error may occur when too many files exist in the current directory.

## 3.6 Sample Files

### ■ Example of function option document file

```

* E0C63558 FUNCTION OPTION DOCUMENT V 0.92
*
* FILE NAME      C35580A0.FDC
* USER'S NAME   SEIKO EPSON CORP.
* INPUT DATE    1998/08/09
* COMMENT       TOKYO DESIGN CENTER
*               421-8 HINO HINO-SHI TOKYO 191-8501 JAPAN
*               TEL 042-587-5816
*               FAX 042-587-5624
*
* #E0C63558 OPTION
* *** OPTION NO.1 ***
* --- MULTIPLE KEY ENTRY RESET COMBINATION ---
* NOT USE ----- SELECTED
OPT0101 01
*
* *** OPTION NO.2 ***
* --- MULTIPLE KEY ENTRY RESET TIME AUTHORIZE ---
* NOT USE ----- SELECTED
OPT0201 01
*
* *** OPTION NO.3 ***
* --- INPUT PORT PULL UP RESISTOR ---
* K00           GATE DIRECT ----- SELECTED
* K01           GATE DIRECT ----- SELECTED
* K02           GATE DIRECT ----- SELECTED
* K03           GATE DIRECT ----- SELECTED
* K10           WITH RESISTOR ----- SELECTED
* K11           WITH RESISTOR ----- SELECTED
* K12           WITH RESISTOR ----- SELECTED
* K13           WITH RESISTOR ----- SELECTED
*OPT0301 02
*OPT0302 02
*OPT0303 02
*OPT0304 02
OPT0305 01
OPT0306 01
OPT0307 01
OPT0308 01
*
* *** OPTION NO.4 ***
* --- OUTPUT PORT OUTPUT SPECIFICATION ---
* R00           COMPLEMENTARY ----- SELECTED
* R01           COMPLEMENTARY ----- SELECTED
* R02           NCH OPEN DRAIN ----- SELECTED
* R03           COMPLEMENTARY ----- SELECTED
* R10           COMPLEMENTARY ----- SELECTED
* R11           COMPLEMENTARY ----- SELECTED
* R12           COMPLEMENTARY ----- SELECTED
* R13           COMPLEMENTARY ----- SELECTED
* R20           COMPLEMENTARY ----- SELECTED
* R21           COMPLEMENTARY ----- SELECTED
* R22           NCH OPEN DRAIN ----- SELECTED
* R23           NCH OPEN DRAIN ----- SELECTED
OPT0401 01
OPT0402 01
OPT0403 02
OPT0404 01
OPT0405 01
OPT0406 01
OPT0407 01
OPT0408 01
OPT0409 01
OPT0410 01
OPT0411 02
OPT0412 02
*
* *** OPTION NO.5 ***
* --- I/O PORT OUTPUT SPECIFICATION ---
* P00           COMPLEMENTARY ----- SELECTED

```

CHAPTER 3: FUNCTION OPTION GENERATOR (fog63558)

```

* P01 COMPLEMENTARY ----- SELECTED
* P02 NCH OPEN DRAIN ----- SELECTED
* P03 NCH OPEN DRAIN ----- SELECTED
* P10 COMPLEMENTARY ----- SELECTED
* P11 COMPLEMENTARY ----- SELECTED
* P12 COMPLEMENTARY ----- SELECTED
* P13 COMPLEMENTARY ----- SELECTED
* P20 NCH OPEN DRAIN ----- SELECTED
* P21 NCH OPEN DRAIN ----- SELECTED
* P22 COMPLEMENTARY ----- SELECTED
* P23 COMPLEMENTARY ----- SELECTED
* P30 COMPLEMENTARY ----- SELECTED
* P31 COMPLEMENTARY ----- SELECTED
* P32 COMPLEMENTARY ----- SELECTED
* P33 COMPLEMENTARY ----- SELECTED
OPT0501 01
OPT0502 01
OPT0503 02
OPT0504 02
OPT0505 01
OPT0506 01
OPT0507 01
OPT0508 01
OPT0509 02
OPT0510 02
OPT0511 01
OPT0512 01
OPT0513 01
OPT0514 01
OPT0515 01
OPT0516 01
*
* *** OPTION NO.6 ***
* --- I/O PORT PULL UP RESISTOR ---
* P0X WITH RESISTOR ----- SELECTED
* P1X WITH RESISTOR ----- SELECTED
* P20 GATE DIRECT ----- SELECTED
* P21 GATE DIRECT ----- SELECTED
* P22 GATE DIRECT ----- SELECTED
* P23 GATE DIRECT ----- SELECTED
* P3X WITH RESISTOR ----- SELECTED
OPT0601 01
OPT0602 01
*OPT0603 02
*OPT0604 02
*OPT0605 02
*OPT0606 02
OPT0607 01
*
* *** OPTION NO.7 ***
* --- DP PORT OUTPUT SPECIFICATION ---
* NCH OPEN DRAIN ----- SELECTED
OPT0701 02
*
* *** OPTION NO.8 ***
* --- SVD EXTERNAL VOLTAGE DETECTION ---
* NOT USE ----- SELECTED
OPT0801 01
*
* *** OPTION NO.9 ***
* --- LCD DRIVER SPECIFICATION ---
* 40SEG * 17COM ----- SELECTED
OPT0901 01
*
* *** OPTION NO.10 ***
* --- FSK INTERNAL FEEDBACK RESISTOR ---
* USE ----- SELECTED
OPT1001 01
*EOF

```

■ Example of function option HEX file (Motorola S2 format)

```

S2240000008004531458F309000000000000000000000F04030F6813FF000000C0000C003702F8
S804000000FB

```



# CHAPTER 4 MASK DATA CHECKER (*mdc63558*)

## 4.1 Outline of *mdc63558*

The mask data checker *mdc63558* is a software tool that checks the format of the input files, code ROM files (c3558xxx.hsa, c3558xxx.lsa), data ROM file (c3558xxx.csa) generated by the hex63558 and the function option document file (c3558xxx.fdc) generated by the fog63558, and generates a data file (c3558xxx.pan) for generating mask patterns. Submit the file generated through this software tool to Seiko Epson.

Moreover, the *mdc63558* has a function to restore the generated data file (c35580a0.pan) to the original file format.

## 4.2 Execution Flow and Input/Output Files

Figure 4.2.1 shows the *mdc63558* execution flow.

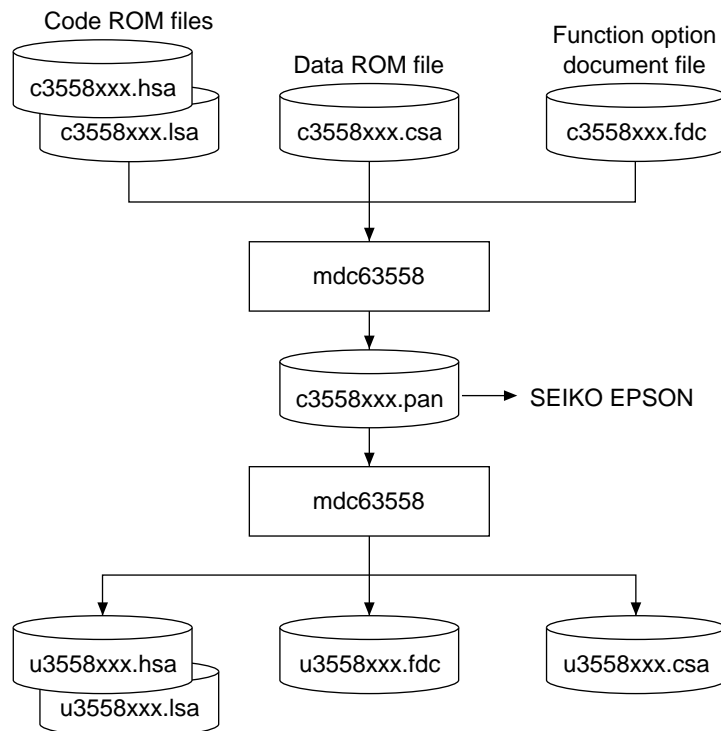


Fig. 4.2.1 *mdc63558* execution flow

**(1) Preparation of code ROM files (c3558xxx.hsa, c3558xxx.lsa) and data ROM file (c3558xxx.csa)**

Prepare the code ROM and data ROM HEX files output from the HEX data converter (hex63558).

**(2) Preparation of function option data file (c3558xxx.fdc)**

Prepare the function option document file output from the function option generator (fog63558).

**(3) Packing of data**

Using the mask data checker (mdc63558), compile the code/data ROM files and function option document file in one data file for masking (c3558xxx.pan). This packing file should be sent to Seiko Epson.

**(4) Unpacking of data**

The data file for masking (c3558xxx.pan) generated by packing process can be restored to the original file using the mask data checker (mdc63558).

*Note: Since the customer code is entered in the xxx part of the file name, it should be as designated by Seiko Epson.*

### 4.3 Operation Procedure

---

#### 4.3.1 Copying each data files

When submitting data to Seiko Epson, copy on the work disk the data generated from the HEX converter (hex63558) and the function option generator (fog63558).


Be sure to assign the following file names. Since the customer code is entered in the xxx part of the file name, it should be as designated by Seiko Epson.


- 1) Code ROM files:                   c3558xxx.hsa  
  c3558xxx.lsa
- 2) Data ROM file:                   c3558xxx.csa
- 3) Function option document file: c3558xxx.fdc

#### 4.3.2 Starting procedure

**(1) Starting command**

To start mdc63558, enter the command as following format at the DOS command level (state in which a prompt such as A> is displayed).

**mdc63558 {-p | -u} <file name> **

 indicates the Return key.

{-p | -u} indicates either one can be specified.

## (2) Option

The options below have been set for the start-up command of the mdc63558.

### -p

Specification of packing. When specifying this option, **an output file name must also be specified**. In this case, the code/data ROM files (~.hsa, ~.lsa, ~.csa) and function option document file (~.fdc) must have the same name (excluding the extension) as the specified output file name.

Furthermore, generation of the output file and reading of the input files are done only for the current directory.

Example: `mdc63558 -p c35580a0.pa0`

### -u

Specification of unpacking. When specifying this option, **an input file name must also be specified**. Furthermore, reading of the input file and generation of the output files are done only for the current directory.

Example: `mdc63558 -u c35580a0.pa0`

### Default (When option has not been specified)

When an option has not been specified, it is designed such that pack/unpack processing can be selected from the operation menu displayed, following start-up. It is set-up such that the packing file name to be output or input can also be specified according to the message displayed.

## (3) Start-up message

When the mdc63558 starts up, the following message is displayed.

Example: When option has not been specified.

```
E0C63558 Mask Data Checker Version x.xx
Copyright (C) SEIKO EPSON CORP. 199x

---<< Operation menu >>---

    1. Pack
    2. Unpack

Please select No.? 1
```

When an option is not specified at the time the start-up command is input, the operation menu is displayed and the user is prompted to select operation. When creating a mask data for submission to Seiko Epson, select "1"; when the mask data is to be split and restored to the original format, select "2". When an option has been specified at the time of start-up of the mdc63558, it executes directly the selected packing or unpacking process without displaying this operation menu.

*Note: In the OS environment setup file "CONFIG.SYS", the number of files that can be opened at the same time must be set at least 10.*

Example: `FILES = 20`

### 4.3.3 Packing of data

When generating data for submission to Seiko Epson, select packing option at the time of start-up of the mdc63558 (see "4.3.2 Starting procedure").

#### (1) Input file name

When the operation menu item 1, "Pack", is selected after starting up the mdc63558 in default (without option specification), the mdc63558 prompts to enter **a file name to be generated**.

Moreover, when the -p option has been specified at the mdc63558 start-up, it executes directly the packing process without displaying the operation menu and confirmation message of the file name to be generated.

```
Input files are: C3558xxx.HSA
                C3558xxx.LSA
                C3558xxx.CSA
                C3558xxx.FDC
Output file is : C3558xxx.PAn

Please input pack file name(C3558xxx.PAn) ? c35580a0.pa0
```

Since the customer code is entered in the xxx part of the file name, it should be as designated by Seiko Epson.

Moreover, after submitting the masking data to Seiko Epson and there is need to re-submit the mask data for reasons such as faulty programs, etc., increase the numeric value of "n" by one when the input is made. For example, when re-submitting data after "c3558xxx.pa0" has been submitted, the pack file name should be entered as "c3558xxx.pa1".

#### (2) Packing process

Access to the input files when packing data is done only for code ROM files (~.hsa, ~.lsa), data ROM file (.csa) and function option document file (.fdc) that have the same name (excluding the extension) as the specified output file name on the current directory.

If there is no problem in inputting of the file name and the contents of the input files, the input data are packed to generate the mask data and displays the generated file name.

With this, the data file for masking is generated. Submit this file to Seiko Epson.

```
Input files are: C35580A0.HSA
                C35580A0.LSA
                C35580A0.CSA
                C35580A0.FDC
Output file is : C35580A0.PA0
```

### 4.3.4 Unpacking data

When restoring the packed data to original file format, select unpacking option at the time of start-up of the mdc63558 (see "4.3.2 Starting procedure").

#### (1) Input file name

When the operation menu item 2, "Unpack", is selected after starting up the mdc63558 in default (without option specification), the mdc63558 prompts to enter **a file name to be unpacked**.

When the -u option has been specified at mdc63558 start-up, it executes directly the unpacking processing without displaying the operation menu and confirmation message of the unpacking file name to be input.

```
Input file is : C3558xxx.PAn
Output files are: U3558xxx.HSA
                  U3558xxx.LSA
                  U3558xxx.CSA
                  U3558xxx.FDC

Please input pack file name(C3558xxx.PAn) ? c35580a0.pa0
```

Since the customer code is entered in the xxx part of the file name, it should be as designated by Seiko Epson.

#### (2) Unpacking process

The mdc63558 finds the specified file from the current directory and loads it for unpacking.

```
Input file is : C35580A0.PA0
Output files are: U35580A0.HSA
                  U35580A0.LSA
                  U35580A0.CSA
                  U35580A0.FDC
```

If there is no problem in the entering of the file name and the input file, the mdc63558 unpacks the file to restore it to the original format files.

The first character of the unpacked file names are replaced with "U".

### 4.3.5 End procedure

When a series of operations is completed, the mdc63558 displays the following message and returns to the DOS command level.

#### (1) When terminated normally

```
Pack/Unpack Completed
A>
```

The output file is generated in the same directory as the input file.

#### (2) When an error occurs

```
Pack file name (C35580K0) error.
A>
```

When an error has occurred, the file is not generated.

## 4.4 Error Messages

In the packing operation, each ROM data file and option file are checked; in the unpacking operation, the packed file is checked. If there is any abnormal each format, the message below is displayed.

The mdc63558 error message lists are indicated below.

### 4.4.1 Start-up error

Message	Explanation
Usage: mdcxxxx [-p,-u] [filename]	The start-up parameter is incorrect.
"xxxxxxx.xxx" file is not found.	The specified file is not found.
Pack file name (xxxxxxx.xxx) error.	A wrong pack file name is specified for packing.
Packed file name (xxxxxxx.xxx) error.	A wrong pack file name is specified for unpacking.

### 4.4.2 ROM data error

When an error message as shown below appears, try to execute the mdc63558 again after checking and re-creating each file. If a similar error still results, please notify Seiko Epson of the situation and the error message displayed.

Message	Explanation
Hex data error : Not S record.	The data does not begin with "S".
Hex data error : Data is not sequential.	The data is not described in the ascending order.
Hex data error : Illegal data.	There is an illegal character.
Hex data error : Too many data in one line.	There are too many data in 1 line.
Hex data error : Check sum error.	The checksum is not correct.
Hex data error : ROM capacity over.	The data capacity is too large.
Hex data error : Not enough the ROM data.	The data capacity is too small.
Hex data error : Illegal start mark.	The start mark is incorrect. (during unpacking)
Hex data error : Illegal end mark.	The end mark is incorrect. (during unpacking)
Hex data error : Illegal comment.	The model name at the beginning of the data is incorrect. (during unpacking)

### 4.4.3 Function option data error

When an error message as shown below appears, try to execute the mdc63558 again after checking and re-creating the file. If a similar error still results, please notify Seiko Epson of the situation and the error message displayed.

Message	Explanation
Option data error : Illegal option number.	The option number is incorrect.
Option data error : Illegal select number.	The option select number is incorrect.
Option data error : Data is not enough.	There is not enough option data.
Option data error : Illegal start mark.	The start mark is incorrect. (during unpacking)
Option data error : Illegal end mark.	The end mark of the option data is incorrect. (during unpacking)
Option data error : Illegal comment.	The model name at the beginning of the option data is incorrect. (during unpacking)

### 4.4.4 File access error

Message	Explanation
Directory Full.	The directory is full.
Disk Write Error.	Writing on the file is failed. This error may occur if there is no disk space.

## 4.5 Packed File

### 4.5.1 Configuration of packed file


The packed file is configured according to the following format:

Model name	[	* * E0C63558 MASK DATA VER x.xx *
Code ROM start mark	—	\PROM
Master slice model name	—	E0C63558xxx PROGRAM ROM
Code ROM	[	S224000000..... : : : : : : : : S804000000FB S224000000..... : : : : : : : : S804000000FB
End mark	—	\END
Data ROM start mark	—	\CHROM
Master slice model name	—	E0C63558xxx CHARACTER ROM
Data ROM	[	S224000000..... : : : : : : : : S804000000FB
End mark	—	\END
Function option start mark	—	\FOPTION
Function option	[	* E0C63558 FUNCTION OPTION DOCUMENT V x.xx * * FILE NAME C3558xxx.FDC * USER'S NAME SEIKO EPSON * INPUT DATE '98/08/09 * COMMENT FOR SAMPLE * *** OPTION NO.1 *** * --- MULTIPLE KEY ENTRY RESET COMBINATION --- * NOT USE ----- SELECTED OPT0101 01 : : : : : : : : OPT1001 01 *EOF
End mark	—	\END

\* \ sometimes appears as ¥, depending on the personal computer being used.

### 4.5.2 ROM data format

Each ROM data is configured as follows, using Motorola S2 format:

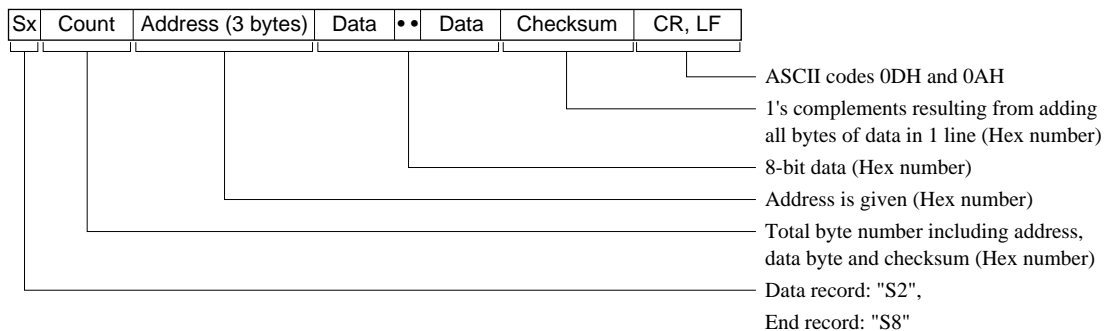

# EPSON International Sales Operations

---

## AMERICA

---

### EPSON ELECTRONICS AMERICA, INC.

#### - HEADQUARTERS -

1960 E. Grand Avenue  
El Segundo, CA 90245, U.S.A.  
Phone: +1-310-955-5300 Fax: +1-310-955-5400

#### - SALES OFFICES -

##### West

150 River Oaks Parkway  
San Jose, CA 95134, U.S.A.  
Phone: +1-408-922-0200 Fax: +1-408-922-0238

##### Central

101 Virginia Street, Suite 290  
Crystal Lake, IL 60014, U.S.A.  
Phone: +1-815-455-7630 Fax: +1-815-455-7633

##### Northeast

301 Edgewater Place, Suite 120  
Wakefield, MA 01880, U.S.A.  
Phone: +1-781-246-3600 Fax: +1-781-246-5443

##### Southeast

3010 Royal Blvd. South, Suite 170  
Alpharetta, GA 30005, U.S.A.  
Phone: +1-877-EEA-0020 Fax: +1-770-777-2637

## EUROPE

---

### EPSON EUROPE ELECTRONICS GmbH

#### - HEADQUARTERS -

Riesstrasse 15  
80992 Munich, GERMANY  
Phone: +49-(0)89-14005-0 Fax: +49-(0)89-14005-110

#### SALES OFFICE

Altstadtstrasse 176  
51379 Leverkusen, GERMANY  
Phone: +49-(0)2171-5045-0 Fax: +49-(0)2171-5045-10

#### UK BRANCH OFFICE

Unit 2.4, Doncastle House, Doncastle Road  
Bracknell, Berkshire RG12 8PE, ENGLAND  
Phone: +44-(0)1344-381700 Fax: +44-(0)1344-381701

#### FRENCH BRANCH OFFICE

1 Avenue de l'Atlantique, LP 915 Les Conquerants  
Z.A. de Courtaboeuf 2, F-91976 Les Ulis Cedex, FRANCE  
Phone: +33-(0)1-64862350 Fax: +33-(0)1-64862355

#### BARCELONA BRANCH OFFICE

**Barcelona Design Center**  
Edificio Prima Sant Cugat  
Avda. Alcalde Barrils num. 64-68  
E-08190 Sant Cugat del Vallès, SPAIN  
Phone: +34-93-544-2490 Fax: +34-93-544-2491

## ASIA

---

### EPSON (CHINA) CO., LTD.

28F, Beijing Silver Tower 2# North RD DongSanHuan  
ChaoYang District, Beijing, CHINA  
Phone: 64106655 Fax: 64107319

#### SHANGHAI BRANCH

4F, Bldg., 27, No. 69, Gui Jing Road  
Caohejing, Shanghai, CHINA  
Phone: 21-6485-5552 Fax: 21-6485-0775

### EPSON HONG KONG LTD.

20/F., Harbour Centre, 25 Harbour Road  
Wanchai, Hong Kong  
Phone: +852-2585-4600 Fax: +852-2827-4346  
Telex: 65542 EPSCO HX

### EPSON TAIWAN TECHNOLOGY & TRADING LTD.

10F, No. 287, Nanking East Road, Sec. 3  
Taipei  
Phone: 02-2717-7360 Fax: 02-2712-9164  
Telex: 24444 EPSONTB

#### HSINCHU OFFICE

13F-3, No. 295, Kuang-Fu Road, Sec. 2  
HsinChu 300  
Phone: 03-573-9900 Fax: 03-573-9169

### EPSON SINGAPORE PTE., LTD.

No. 1 Temasek Avenue, #36-00  
Millenia Tower, SINGAPORE 039192  
Phone: +65-337-7911 Fax: +65-334-2716

### SEIKO EPSON CORPORATION KOREA OFFICE

50F, KLI 63 Bldg., 60 Yoido-dong  
Youngdeungpo-Ku, Seoul, 150-763, KOREA  
Phone: 02-784-6027 Fax: 02-767-3677

### SEIKO EPSON CORPORATION

#### ELECTRONIC DEVICES MARKETING DIVISION

##### Electronic Device Marketing Department

##### IC Marketing & Engineering Group

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN  
Phone: +81-(0)42-587-5816 Fax: +81-(0)42-587-5624

##### ED International Marketing Department Europe & U.S.A.

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN  
Phone: +81-(0)42-587-5812 Fax: +81-(0)42-587-5564

##### ED International Marketing Department Asia

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN  
Phone: +81-(0)42-587-5814 Fax: +81-(0)42-587-5110



**S5U1C63558D Manual**  
(Development Software Tool for S1C63558)

**SEIKO EPSON CORPORATION**  
**ELECTRONIC DEVICES MARKETING DIVISION**

■ EPSON Electronic Devices Website

<http://www.epson.co.jp/device/>