更新日:2025, July

梱包仕様

SMD タイプは梱包数量も規定しております。推奨梱包数の整数倍でのご発注を標準とさせていただきます。

1. SMD タイプ

テーピング形式 EIA-481 および IEC-60286 に準拠し送品します。

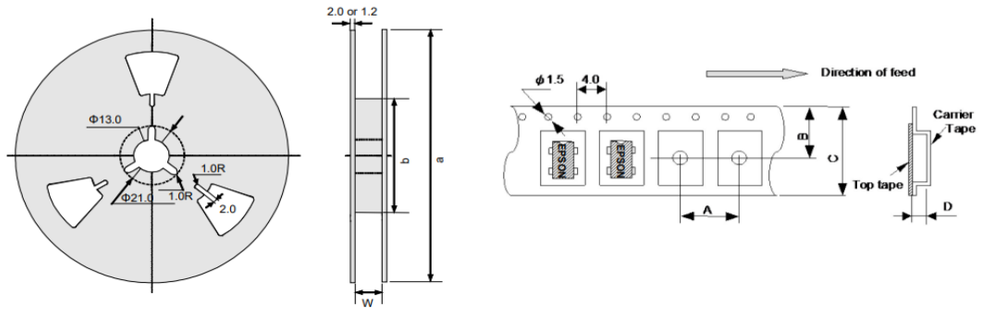

推奨梱包数量と寸法（単位:**mm**）

●Crystal unit

機種名	梱包数量	リール寸法			キャリア寸法				テープ引出し方向
	(個/リール)	a	b	W	A	B	C	D	(1番ピンが左上方向=L)
kHz Range Crystal unit									
FC1610AN	5000	Φ180	Φ60	9	4	5.25	8	0.65	L
FC1610BN	5000	Φ180	Φ60	9	4	5.25	8	0.65	L
FC2012AN	5000	Φ180	Φ60	9	4	5.25	8	0.75	L
FC2012SN	5000	Φ180	Φ60	9	4	5.25	8	0.75	L
FC-12M	5000	Φ180	Φ60	9	4	5.25	8	0.75	L
FC3215AN	3000	Φ180	Φ60	13	4	7.25	12	1	L
FC-135 / FC-135R	3000	Φ180	Φ60	13	4	7.25	12	1	L
MC-146	9000	Φ330	Φ80 or Φ100	17	4	9.25	16	1.6	L
MC-306	3000	Φ330	Φ80 or Φ100	17.5	8	9.25	16	2.7	L
FC2012AA	5000	Φ180	Φ60	9	4	5.25	8	0.75	L
FC-13A	3000	Φ180	Φ60	13	4	7.25	12	1	L
MC-30A	3000	Φ330	Φ80 or Φ100	17.5	8	9.25	16	2.7	L
MHz Range Crystal unit									
FA1008AN	6000	Φ180	Φ60	9	4	5.25	8	0.35	L
FA1210AN	6000	Φ180	Φ60	9	4	5.25	8	0.45	L
FA-118T	6000	Φ180	Φ60	9	4	5.25	8	0.5	L
FA-128	5000	Φ180	Φ60	9	4	5.25	8	0.7	L
FA-20H	5000	Φ180	Φ60	9	4	5.25	8	0.75	L
FA-238V	4000	Φ180	Φ60	9	4	5.25	8	1.05	L
FA-238	4000	Φ180	Φ60	9	4	5.25	8	1.05	L
TSX-3225	4000	Φ180	Φ60	9	4	5.25	8	1	L
FA1612AA	6000	Φ180	Φ60	9	4	5.25	8	0.5	L
FA2016AA	5000	Φ180	Φ60	9	4	5.25	8	0.7	L
FA-238A	4000	Φ180	Φ60	9	4	5.25	8	1.05	L
FA1612AS	5000	Φ180	Φ60	9	4	5.25	8	0.7	L
FA2016AS	5000	Φ180	Φ60	9	4	5.25	8	0.7	L
FA2016ASA	3000	Φ180	Φ60	9	4	5.25	8	0.7	L

●SPXO

機種名	梱包数量	リール寸法			キャリア寸法				テープ引出し方向
	(個/リール)	a	b	W	A	B	C	D	(1番ピンが左上方向=L)
SG2016CAN / CAA	3000	Φ180	Φ60	9	4	5.25	8	1	L
SG2016EGN / VGN	2000	Φ180	Φ60	9	4	5.25	8	1	L
SG2016EHN / VHN	2000	Φ180	Φ60	9	4	5.25	8	1	L
SG2016HHN / HGN	2000	Φ180	Φ60	9	4	5.25	8	1	L
SG-210 STF	3000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG2520EGN / VGN	2000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG2520EHN / VHN	2000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG2520HHN / HGN	2000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG-3031CM	3000	Φ180	Φ60	13	4	7.25	12	1	L
SG-3031CMA	3000	Φ180	Φ60	13	4	7.25	12	1	L
SG3225CAN	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
SG3225EAN / VAN / EEN / VEN	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
SG3225HBN	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
SG5032CAN / CCN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
SG5032EAN / VAN / EEN / VEN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
SG7050CAN / CCN	1000	Φ254	Φ100	17.4	8	9.25	16	2	L
SG7050EAN / VAN	1000	Φ254	Φ100	17.4	8	9.25	16	2	L
SG7050EEN / VEN	1000	Φ180	Φ60	17	8	9.25	16	2	L
SG-850xCA	1000	Φ180	Φ60	17	8	9.25	16	2	L

●SPSO(Low-Jitter SAW)

EG-2102CA	1000	Φ180	Φ60	17	8	9.25	16	2	L
EG-2102CB	1000	Φ180	Φ60	13	8	7.25	12	1.7	L
EG-2121CB	1000	Φ180	Φ60	13	8	7.25	12	1.7	L
XG-2102CA	1000	Φ180	Φ60	17	8	9.25	16	2	L
XG-2103CA	1000	Φ180	Φ60	17	8	9.25	16	2	L
XG-2121CA	1000	Φ180	Φ60	17	8	9.25	16	2	L
XG5032HAN	1000	Φ180	Φ60	13	8	7.25	12	1.7	L

●Programmable & Spread Spectrum

SG-8101CA / SG-8018CA	1000	Φ254	Φ100	17.4	8	9.25	16	2	L
SG-8101CB / SG-8018CB	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
SG-8101CE / SG-8018CE	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
SG-8101CG SG-8018CG / CGA	3000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG-8200CG SG-8201CG / CGA	3000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG-8200CJ SG-8201CJ / CJA	3000	Φ180	Φ60	9	4	5.25	8	1	L
SG-9101CA	1000	Φ254	Φ100	17.4	8	9.25	16	2	L
SG-9101CB	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
SG-9101CE	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
SG-9101CG / CGA	3000	Φ180	Φ60	9	4	5.25	8	1.15	L

As of 2025, July

PACKING SPECIFICATIONS

For SMD products, recommendation packing quantity is specified as below table. Please order in accordance with packing quantity.

1. SMD

SMD products are packed in the shipping carton as below table in accordance with taping standards EIA-481 and IEC-60286.

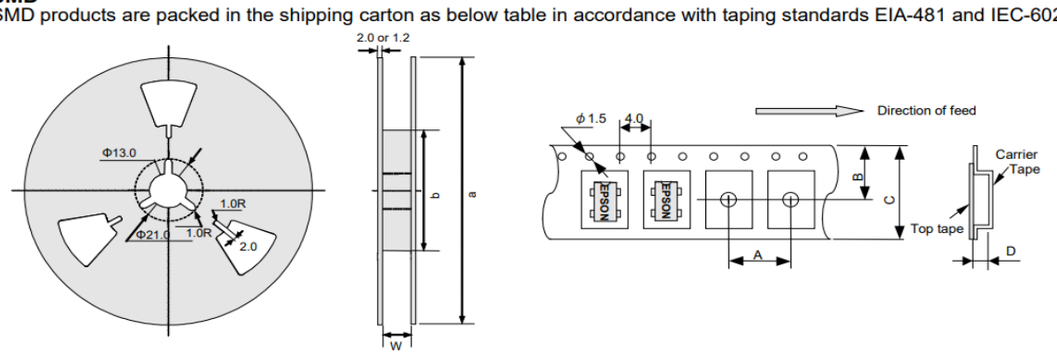

RECOMMENDATION PACKING QUANTITY and DIMENSION (Unit: mm)

●Crystal unit

Model	Quantity	Reel dimension			Career Tape dimension				Direction of feed
	(pcs/Reel)	a	b	W	A	B	C	D	(L=left direction)
kHz Range Crystal unit									
FC1610AN	5000	Φ180	Φ60	9	4	5.25	8	0.65	L
FC1610BN	5000	Φ180	Φ60	9	4	5.25	8	0.65	L
FC2012AN	5000	Φ180	Φ60	9	4	5.25	8	0.75	L
FC2012SN	5000	Φ180	Φ60	9	4	5.25	8	0.75	L
FC-12M	5000	Φ180	Φ60	9	4	5.25	8	0.75	L
FC3215AN	3000	Φ180	Φ60	13	4	7.25	12	1	L
FC-135 / FC-135R	3000	Φ180	Φ60	13	4	7.25	12	1	L
MC-146	9000	Φ330	Φ80 or Φ100	17	4	9.25	16	1.6	L
MC-306	3000	Φ330	Φ80 or Φ100	17.5	8	9.25	16	2.7	L
FC2012AA	5000	Φ180	Φ60	9	4	5.25	8	0.75	L
FC-13A	3000	Φ180	Φ60	13	4	7.25	12	1	L
MC-30A	3000	Φ330	Φ80 or Φ100	17.5	8	9.25	16	2.7	L
MHz Range Crystal unit									
FA1008AN	6000	Φ180	Φ60	9	4	5.25	8	0.35	L
FA1210AN	6000	Φ180	Φ60	9	4	5.25	8	0.45	L
FA-118T	6000	Φ180	Φ60	9	4	5.25	8	0.5	L
FA-128	5000	Φ180	Φ60	9	4	5.25	8	0.7	L
FA-20H	5000	Φ180	Φ60	9	4	5.25	8	0.75	L
FA-238V	4000	Φ180	Φ60	9	4	5.25	8	1.05	L
FA-238	4000	Φ180	Φ60	9	4	5.25	8	1.05	L
TSX-3225	4000	Φ180	Φ60	9	4	5.25	8	1	L
FA1612AA	6000	Φ180	Φ60	9	4	5.25	8	0.5	L
FA2016AA	5000	Φ180	Φ60	9	4	5.25	8	0.7	L
FA-238A	4000	Φ180	Φ60	9	4	5.25	8	1.05	L
FA1612AS	5000	Φ180	Φ60	9	4	5.25	8	0.7	L
FA2016AS	5000	Φ180	Φ60	9	4	5.25	8	0.7	L
FA2016ASA	3000	Φ180	Φ60	9	4	5.25	8	0.7	L

●SPXO

Model	Quantity	Reel dimension			Career Tape dimension				Direction of feed
	(pcs/Reel)	a	b	W	A	B	C	D	(L=left direction)
SG2016CAN / CAA	3000	Φ180	Φ60	9	4	5.25	8	1	L
SG2016EGN / VGN	2000	Φ180	Φ60	9	4	5.25	8	1	L
SG2016EHN / VHN	2000	Φ180	Φ60	9	4	5.25	8	1	L
SG2016HHN / HGN	2000	Φ180	Φ60	9	4	5.25	8	1	L
SG-210 STF	3000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG2520EGN / VGN	2000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG2520EHN / VHN	2000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG2520HHN / HGN	2000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG-3031CM	3000	Φ180	Φ60	13	4	7.25	12	1	L
SG-3031CMA	3000	Φ180	Φ60	13	4	7.25	12	1	L
SG3225CAN	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
SG3225EAN / VAN / EEN / VEN	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
SG3225HBN	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
SG5032CAN / CCN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
SG5032EAN / VAN / EEN / VEN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
SG7050CAN / CCN	1000	Φ254	Φ100	17.4	8	9.25	16	2	L
SG7050EAN / VAN	1000	Φ254	Φ100	17.4	8	9.25	16	2	L
SG7050EEN / VEN	1000	Φ180	Φ60	17	8	9.25	16	2	L
SG-850xCA	1000	Φ180	Φ60	17	8	9.25	16	2	L

●SPSO(Low-Jitter SAW)

EG-2102CA	1000	Φ180	Φ60	17	8	9.25	16	2	L
EG-2102CB	1000	Φ180	Φ60	13	8	7.25	12	1.7	L
EG-2121CB	1000	Φ180	Φ60	13	8	7.25	12	1.7	L
XG-2102CA	1000	Φ180	Φ60	17	8	9.25	16	2	L
XG-2103CA	1000	Φ180	Φ60	17	8	9.25	16	2	L
XG-2121CA	1000	Φ180	Φ60	17	8	9.25	16	2	L
XG5032HAN	1000	Φ180	Φ60	13	8	7.25	12	1.7	L

●Programmable & Spread Spectrum

SG-8101CA / SG-8018CA	1000	Φ254	Φ100	17.4	8	9.25	16	2	L
SG-8101CB / SG-8018CB	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
SG-8101CE / SG-8018CE	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
SG-8101CG SG-8018CG / CGA	3000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG-8200CG SG-8201CG / CGA	3000	Φ180	Φ60	9	4	5.25	8	1.15	L
SG-8200CJ SG-8201CJ / CJA	3000	Φ180	Φ60	9	4	5.25	8	1	L
SG-9101CA	1000	Φ254	Φ100	17.4	8	9.25	16	2	L
SG-9101CB	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
SG-9101CE	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
SG-9101CG / CGA	3000	Φ180	Φ60	9	4	5.25	8	1.15	L

●Real Time Clock Module

機種名	梱包数量	リール寸法			キャリア寸法				テープ引出し方向
	(個/リール)	a	b	W	A	B	C	D	(1番ピンが左上方向=L)
RA-4565SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RA4803SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RA8803SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RTC-8564JE	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	2	L
RTC-8564NB	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	1.8	L
RX****CE/ RA****CE	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
RX-4035LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-4035SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-4045NB	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	1.8	L
RX-4045SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-4571LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-4571NB	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	1.8	L
RX-4571SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-4803LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-4803SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX6110SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX8010SJ	1000	Φ330	Φ80	17.5	12	9.25	16	2.95	L
RX-8025NB	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	1.8	L
RX-8025SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-8035LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-8035SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-8564LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-8571LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-8571SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-8731LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-8803LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-8803SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX8900SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L

●Real Time Clock Module

Model	Quantity	Reel dimension			Career Tape dimension				Direction of feed
	(pcs/Reel)	a	b	W	A	B	C	D	(L=left direction)
RA-4565SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RA4803SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RA8803SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RTC-8564JE	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	2	L
RTC-8564NB	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	1.8	L
RX****CE/ RA****CE	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
RX-4035LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-4035SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-4045NB	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	1.8	L
RX-4045SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-4571LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-4571NB	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	1.8	L
RX-4571SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-4803LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-4803SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX6110SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX8010SJ	1000	Φ330	Φ80	17.5	12	9.25	16	2.95	L
RX-8025NB	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	1.8	L
RX-8025SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-8035LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-8035SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-8564LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-8571LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-8571SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX-8731LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-8803LC	2000	Φ180	Φ60	13	4	7.25	12	1.45	L
RX-8803SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L
RX8900SA	1000	Φ330	Φ80 or Φ100	17.5	12	9.25	16	3.65	L

●TCXO

機種名	梱包数量	リール寸法			キャリア寸法				テープ引出し方向
	(個/リール)	a	b	W	A	B	C	D	(1番ピンが左上方向=L)
TG1612SLN	3000	Φ180	Φ60	9.4	4	5.25	8	1.15	L
TG2016SLN	3000	Φ180	Φ60	9.4	4	5.25	8	1.15	L
TG2016SMN	12000	Φ330	Φ100	9.4	4	5.25	8	1	L
	3000	Φ180	Φ60	9	4	5.25	8	1	L
TG2520CEN	10000	Φ330	Φ100	9.4	4	5.25	8	1	L
	3000	Φ180	Φ60	9	4	5.25	8	1	L
TG2520SMN	10000	Φ330	Φ100	9.4	4	5.25	8	1	L
	3000	Φ180	Φ60	9	4	5.25	8	1	L
TG3225CEN	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
TG-3541CE / TG3541CEA	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
TG-5006CE	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
TG-5006CG	2000	Φ180	Φ60	9	4	5.25	8	1.15	L
TG-5006CJ	12000	Φ330	Φ100	9.4	4	5.25	8	1	L
	3000	Φ180	Φ60	9	4	5.25	8	1	L
TG5032CFN /SFN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
TG5032CGN / SGN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
TG5032CKN / SKN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
TG5032CMN / SMN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
TG-5510CA / TG-5511CA	1000	Φ180	Φ60	17	8	9.25	16	2	L
TG-5510CB / TG-5511CB	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
TG7050xKN / xMN	1000	Φ180	Φ60	17	8	9.25	16	2	L

●TCXO

Model	Quantity	Reel dimension			Career Tape dimension				Direction of feed
	(pcs/Reel)	a	b	W	A	B	C	D	(L=left direction)
TG1612SLN	3000	Φ180	Φ60	9.4	4	5.25	8	1.15	L
TG2016SLN	3000	Φ180	Φ60	9.4	4	5.25	8	1.15	L
TG2016SMN	12000	Φ330	Φ100	9.4	4	5.25	8	1	L
	3000	Φ180	Φ60	9	4	5.25	8	1	L
TG2520CEN	10000	Φ330	Φ100	9.4	4	5.25	8	1	L
	3000	Φ180	Φ60	9	4	5.25	8	1	L
TG2520SMN	10000	Φ330	Φ100	9.4	4	5.25	8	1	L
	3000	Φ180	Φ60	9	4	5.25	8	1	L
TG3225CEN	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
TG-3541CE / TG3541CEA	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
TG-5006CE	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
TG-5006CG	2000	Φ180	Φ60	9	4	5.25	8	1.15	L
TG-5006CJ	12000	Φ330	Φ100	9.4	4	5.25	8	1	L
	3000	Φ180	Φ60	9	4	5.25	8	1	L
TG5032CFN /SFN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
TG5032CGN / SGN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
TG5032CKN / SKN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
TG5032CMN / SMN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
TG-5510CA / TG-5511CA	1000	Φ180	Φ60	17	8	9.25	16	2	L
TG-5510CB / TG-5511CB	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
TG7050xKN / xMN	1000	Φ180	Φ60	17	8	9.25	16	2	L

●VCXO/VCSO

VG3225EFN / VFN	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
VG5032EDN / VDN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
VG5032EFN / VFN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
VG7050CDN	1000	Φ180	Φ60	17	8	9.25	16	2	L
VG7050EAN / EBN / ECN	1000	Φ180	Φ60	17	8	9.25	16	2	L
VG7050EFN / VFN	1000	Φ180	Φ60	17	8	9.25	16	2	L

●VCXO/VCSO

VG3225EFN / VFN	2000	Φ180	Φ60	9	4	5.25	8	1.4	L
VG5032EDN / VDN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
VG5032EFN / VFN	1000	Φ180	Φ60	13	8	7.25	12	1.4	L
VG7050CDN	1000	Φ180	Φ60	17	8	9.25	16	2	L
VG7050EAN / EBN / ECN	1000	Φ180	Φ60	17	8	9.25	16	2	L
VG7050EFN / VFN	1000	Φ180	Φ60	17	8	9.25	16	2	L

●Multi output oscillator

MG7050 series	1000	Φ180	Φ60	17	8	9.25	16	2.1	L

●Multi output oscillator

MG7050 series	1000	Φ180	Φ60	17	8	9.25	16	2.1	L

●Module

SR3225SAA	3000	Φ180	Φ60	9	4	5.25	8	1.4	L

●Module

SR3225SAA	3000	Φ180	Φ60	9	4	5.25	8	1.4	L

●Sensor

XV-3510CB	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XV4001Bx	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XV4001Kx	1000	Φ254	Φ100	13.4	8	7.25	12	3.7	L
XV7011BB / XV7001BB	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XV7021BB / XV7081BB	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XV7181BB	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XV4311BD	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XC1011SD	2000	Φ330	Φ80 or Φ100	17.4	8	9.25	16	2.2	L

●Sensor

XV-3510CB	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XV4001Bx	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XV4001Kx	1000	Φ254	Φ100	13.4	8	7.25	12	3.7	L
XV7011BB / XV7001BB	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XV7021BB / XV7081BB	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XV7181BB	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XV4311BD	2000	Φ254	Φ100	13.4	8	7.25	12	2.1	L
XC1011SD	2000	Φ330	Φ80 or Φ100	17.4	8	9.25	16	2.2	L